


DRIVE BELTS & PROFILES

Open-Ended Timing Belts

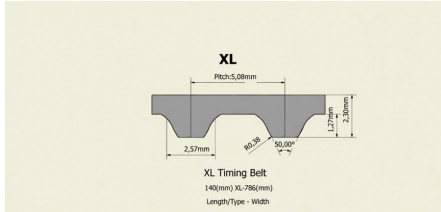

Timing belt lengths for power transmission and positioning applications. Confirm tooth profile, pitch, width and tensile member.

Unit for enquiry: metre | Product range

Product range reference. Colour and supplied configuration are confirmed with your quotation.

PRODUCT DETAILS

Supply	Open-ended lengths
Match	Profile and pulley geometry

TYPES / CONFIGURATIONS

Steel cord | Aramid / Kevlar cord

This is a Beccentric product information and selection sheet. It is not a certified engineering drawing or a guarantee of stock. Confirm the exact product, compatibility and operating limits before ordering.

Specify your requirement

Open-Ended Timing Belts

The choices below help prepare an enquiry. Other sizes and identification assistance can be requested. Not every combination is available.

Belt width (mm)	Enter your dimensions / reference, or ask for help identifying the item.
Tooth profile	T5, T10, AT5, AT10, S5M, S8M
Required length (mm)	Cut length
Application / reinforcement	Duty and existing belt reference

INCLUDE WITH YOUR ENQUIRY

Include belt width (mm), tooth profile, required length (mm), application / reinforcement, quantity, photographs and required date.

Quantity: _____ Required date: _____

Company / RFQ reference: _____

Exact replacement only / alternative for approval: _____

CONTACT & DOCUMENTATION

[View this product and choose specifications at beccentric.net](#)

WhatsApp Mary: +263 780 864 277

WhatsApp Tino: +263 779 098 357

Email: sales@beccentric.net

Request a drawing, material certificate, food-contact declaration or safety data sheet when your application requires one. These documents relate to the exact product quoted.

Reference basis: Belting Edge product reference. Compiled 25 September 2026. Supplier material is used to identify the range; Beccentric handles your enquiry.